




**MOVFE 2500 LINEAR DOOR OPERATING EQUIPMENT ESTIMATE/ORDER FORM**

From: \_\_\_\_\_ Sheet \_\_\_\_\_ of \_\_\_\_\_  
 Customer \_\_\_\_\_ Phone \_\_\_\_\_ Date \_\_\_\_\_  
 Requested by \_\_\_\_\_ Fax \_\_\_\_\_ Date reqd. \_\_\_\_\_  
 Customer Address \_\_\_\_\_ Job No. \_\_\_\_\_ Estimate # \_\_\_\_\_  
 \_\_\_\_\_ Ship To \_\_\_\_\_ Purchase order # \_\_\_\_\_  
 Job name \_\_\_\_\_ Car # \_\_\_\_\_

DOOR OPENING \_\_\_\_\_ x \_\_\_\_\_  
 WIDTH HEIGHT

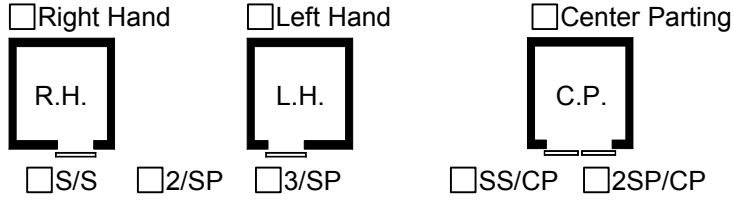

New Installation  Modernization (provide survey sheets)  
 Advise Existing Door Equipment Mfg \_\_\_\_\_ Comply with Code \_\_\_\_\_

QTY	PRODUCT
_____	MOVFE 2500 LINEAR (Includes Drive Arm(s) & Gate Switch) HEADER HEIGHT _____ (Distance from Top of Car Door to Operator Support)
_____	Door Operator Voltage 230V Drive 115V Drive
_____	Hand-Held Parametre Tool Required
_____	CAN BUS Module Required

_____	CAR DOOR HANGER (Includes Header Plate, Track & Sheave Hangers)	Track Length: _____
_____	CAR DOOR CLUTCH GAL ECI _____	RUNNING CLEARANCE _____
	with zone lock without zone lock	SILL SPACING _____
_____	INFRARED CURTAIN Formula Systems + U5 Chip - w/o nudging	Formula Systems Vision Plus 3D (2019)
	Formula Systems - w/ nudging/power supply	_____
_____	HATCH DOOR HANGER (Includes Tracks & Sheave Hangers)	( ) L.H. Track Length: _____ ( ) R.H.
_____	DOOR CLOSER Spring (linkage) ( ) RH ( ) LH	Reel (spirator) S/S & C/P Doors only
_____	INTERLOCK (Includes Roller Release) GAL ECI	( ) L.H. ( ) R.H.
_____	EMERGENCY UNLOCKING KEY (INT1H-0034N)	
_____	ESCUTCHEONS 1.5" X 0.5" Dia. 2.0" X 0.5" Dia. 2.75" X 0.5" Dia.	
_____	KEY BOX Stainless Steel Muntz Metal Flush Mounted Surface Mounted	
	#4 Satin #8 Mirror	
_____	CLUTCH PLATE 8" X 16"	PICK UP PLATE 8" X 6"
_____	KEEPER PLATE 10 3/4" x 3 1/4"	ADJUSTABLE LOCK MOUNTING BRACKET (4C)

Cab Mfg:  New  Existing Entrance Mfg:  New  Existing Controller Mfg:  New  Existing




**GAL CANADA ELEVATOR PRODUCTS**

6500 GOTTARDO CRT, MISSISSAUGA, ONT. L5T 2A2  
 TEL: 416-747-7967....FX: 416-747-9035  
 TEL: 1-888-425-2262

**MOVFE2500 LINEAR OPERATOR ORDER FORM**

CLOSING AS VIEWED FROM HALL DETERMINES HAND.

▲ **HEADER HEIGHT=DISTANCE FROM CLEAR OPENING TO BASE OF OPERATOR**

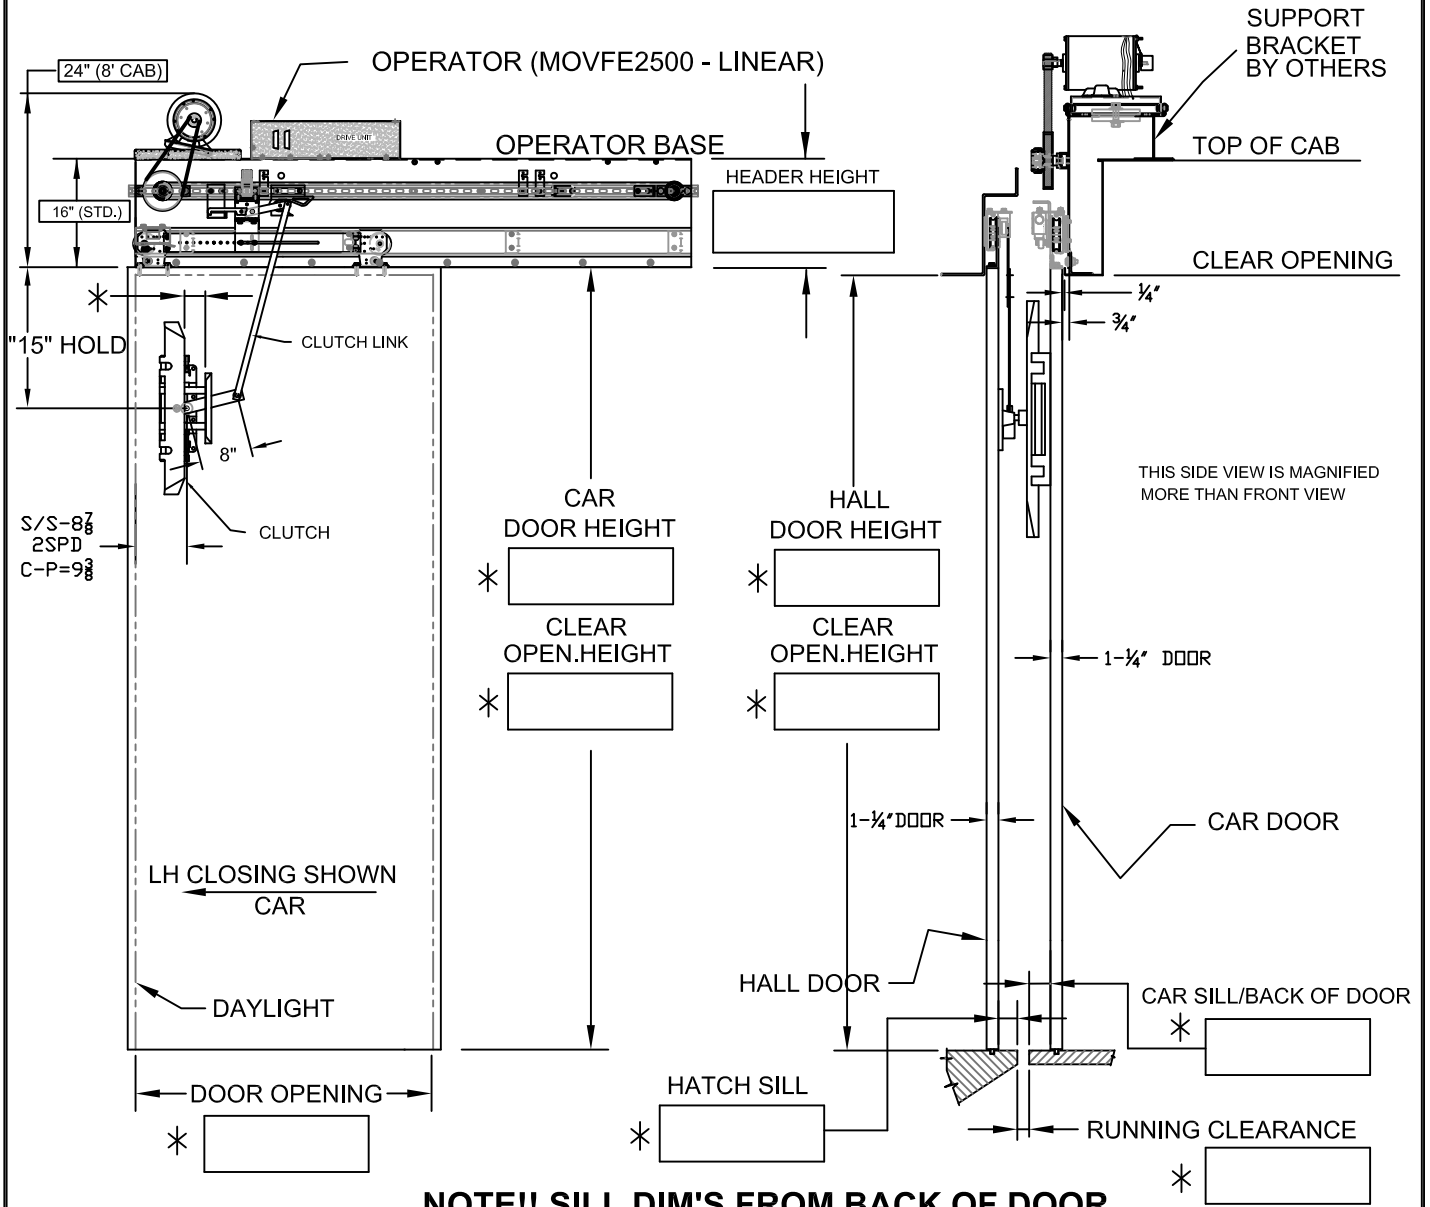

**NOTE!! SILL DIM'S FROM BACK OF DOOR**

CUSTOMER.....  
 P.O.#.....  
 G.A.L. #.....  
 JOB NAME.....  
 CAR #.....  
 CONTACT INFO.....

**OPERATOR TYPE**

- # 1 MOVFE2500 1/2 H.P. HEAVY DUTY DOOR OPERATOR,CLOSED-LOOP .....
- # 2 MOVFE2500 1/8 H.P. LIGHT DUTY DOOR OPERATOR,CLOSED-LOOP .....
- # 3 IS HEADER PLATE REQUIRED WITH OPERATOR ? .....
- # 4 ADDITIONAL I/O BOARD (HEAVY/NARROW DOORS) .....
- # 5 PARAMETER HAND HELD UNIT .....
- # 6 CAN BUS (GALAXY CONTROLLER) .....
- # 7 AUX.SENSOR IS OPTIONAL(NARROW DOOR) .....

**NOTE!!** FOR HEADER HEIGHTS - SSL/2 SPD. & C-P=16"(8'CAB) INCREASES BY 6" INCREMENTS UP TO 40"(10"CAB)  
 HIGH CAB KITS(EXT.PLATES 3X) WILL USED FOR 8'-6" CAB & UP.